Multisystem Video Converter/Stabilizer

Ideal for use in video error correction and system conversion

Features:

* Automatically recognizes TV system of the video input and converts it to NTSC or PAL output.
* Regenerates sync.(but not frame pulses- not suitable for older television that do not support 50/60 Hz switching) and restored color burst of the Video input to achieve an error-free standard Video output.
* Ideal for use in video system conversion or back-up of home video tapes and discs.
* Supports composite and S-Video inputs and outputs.

Applications:

Cypress CCR-9 Video Stabilizer/Stanards Convertors is a simple plug and play unit that let you make a perfect video copying without any quality loss, also great for systems conversion.

System Configuration

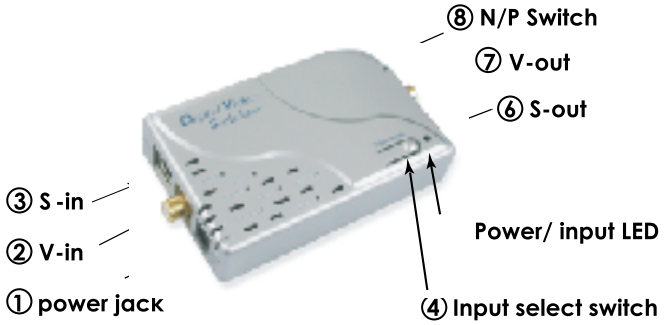

1. power jack: 7.5V 500mA center positive.

2. V-in: Connects to Video output of the source device.

3. S -in: Connects to S-Video output of the source device.

4. Input select switch:

Press the button to select composite video or S-Video as input source.

5. Power/ input LED:

When power plug is not connected, LED is OFF.

When power is ON and composite video is selected as input source the LED lights green.

When power is ON and S-Video is selected as input source the LED lights red.

6. S-out:

S-Video output connector connects to TV or recording devices such as VCR or DVD Recorder.

7. V-out:

Composite output connector connects to TV or recording devices such or VCR or DVD Recorder

8. N/P switch: Set to N for NTSC output, Set to PAL for PAL output.

Specification

*** Input :**

1 x Composite Video RCA Jack 70 ohm 1Vp-p

1 x S-Video 4-pin mini Din: Y: 1Vp-p 75 ohm.

C: 0.286 Vpp burst signal 75 ohm.

*** Output Connector:**

1 x Composite Video RCA Jack 75 ohm 1Vp-p

1 x S-Video 4-pin mini Din.

Power: DC 7.5V 500mA

Dimensions: 114(W) x 65(D) x 26(H)mm

Accessory: One set of video cable, one set of adaptor, and User manual.

Weight: 90g