

Professional CCTV LCD Monitor

Ideal for CCTV installation
demonstration and testing




The world's leading CCTV LCD monitor



Model No.	LV-56R01
LCD Display	5.6" TFT LCD Monitor
Resolution	320mm (H) x 234mm(V) (4:3)
Contrast ratio	150
Brightness	300cd/m ² (TYP.)
Response Time Tr / Tf	35ms(tr+tf)(TYP.)
Dimension	180(W) x 120(H) x 34(D)mm
Packing Dimension	TBD
Display Mode	Video 1, Video 2, Test pattern
Input	2 x BNC Inputs (1.0 Vp-p 75Ω) 1 x Audio Input (3.5ϕ Stereo Jack)
Output	1 x BNC Outputs (2.0 Vp-p 75Ω) 1 x Audio Output (3.5ϕ Stereo Jack)
Front Control Panel Buttons	Power on/off, LED indicator, Source, UP (Volume Increase), Down (Volume Decrease),
Operating Condition	Temperature: 0°C ~ 40°C
Storage Condition	Temperature: -10°C ~ 60°C
Power Input	AC Input : 100 ~ 240V/1.5A, 50 / 60Hz
Power Consumption	DC 12V/20W
Rechargeable battery	Li-Po battery (2.5 hrs lifetime)
Weight	TBD
Stands / bracket supported	1/4" standard screw mount on bottom

Specification subject to change without notice.

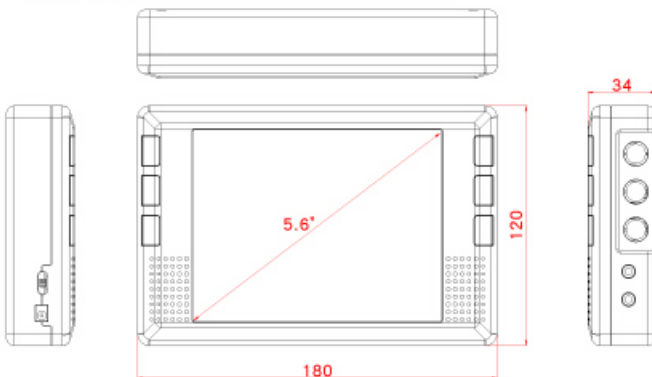


Features :

- Ideal for CCTV installation, demonstration and testing
- Lightweight & compact size
- Resolution 320x234 Pixels
- NTSC/PAL Auto Recognition
- Two Video BNC inputs
- Audio input tests the audio signal
- Test pattern generator (color bars/ cross hatch/ RGB/Dot)
- Multi-language support OSD
- Carrying strap and travel case
- Rechargeable battery and AC adaptor
- Anti-scratch & anti-reflectiveness visor
- Last memory for settings when powered off
- Power saving while no signal input
- DC 9~24V operation

Kit includes :

- 1) 5.6" TFT LCD monitor
- 2) Travel case with carrying and waist strap
- 3) AC adaptor
- 4) Rechargeable Li-Po battery
- 5) 12VDC vehicle cigar lighter charger
- 6) 3.5ϕ Stereo Jack to RCA jack cable

Test Pattern Generator :

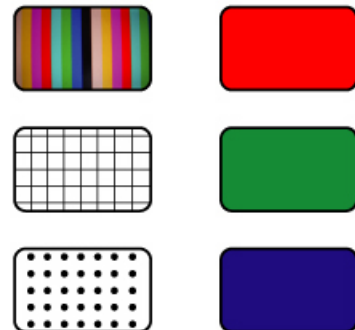

2006.10



台灣視訊系統股份有限公司
TAIWAN VIDEO SYSTEM CO., LTD.
http://www.tvs.com.tw e-mail: info@tvs.com.tw

TVS GROUP
USA TVSA e-mail: info@eversun.com
Germany TVSG e-mail: info@tvsg.de
China TVSC e-mail: info@tvsc.com.cn