

4CH AHD/CVI/TVI/D1 HD-QUAD Processor

QD-04

Features:




- * 4 channels video inputs, each channel can accept TVI/AHD/CVI/D1 signal, the format of input video (D1/AHD/TVI/CVI) and video mode(PAL/NTSC) can setting.
- * For each channel, the brightness/contrast/saturation and color can adjust.
- * Support 2 channels CVBS outputs(NTSC: 720X480, PAL: 720X576).
- * Support HDMI/VGA output and the resolution of output can setting(1024x768、1280x1024、1440x900、720P/50/60、1080P/50/60).
- * Support display modes: include QUAD, 2CH(left/right), 2CH(UP/DOWN), 3CH, single channel and PIP mode.
- * The output channel of PIP mode can select by the menu.
- * High performance FREEZE function.
- * Support channel auto sequence, the interval time can adjust by menu(3~99sec.).
- * Support ZOOM function.
- * Support the alarm of video loss.
- * Users can operate device by keyboard and remote control.
- * Support English menu, the input, display, image, auto sequence and system reset can setting by the menu.

Specification

Model	QD-4
Video Input	4CH TVI/AHD/CVI/D1
Video Output	HDMI/VGA/CVBS
Power Supply	DC 12V/1A
Consumption	<4W
Working Temperature	-10°C~+55°C
Working Humidity	10%~90%
Dimension	210x150x40mm
Weight	0.81kg

Front panel :

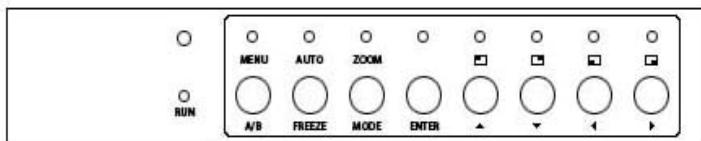

The KEY define : short key <1s , longkey >1s

- “MEUN/A/B” : long press to enter main menu, short press to enter QUAD mode.
- “FRZ/AUTO” : short press to enter freeze function, long press to enter autoseq function.
- “MODE/ZOOM” : short press to enter mode function, long press to enter zoom function.
- “ENTER” : enter button.
- “▲” : 1CH/UP multi-function button.
- “▼” : 2CH/DOWN multi-function button.
- “◀” : 3CH/LEFT multi-function button.
- “▶” : 4CH/RIGHT multi-function button.