



PM-976 Hyper-cardioid Condenser Microphone

The shotgun microphones from E-IMAGE features Hypercardioid pattern, high sensitivity and high consonant articulation. It can be used to capture audio in various indoor or outdoor environments for film, broadcast TV, and other video applications. It is durable with all metal body.

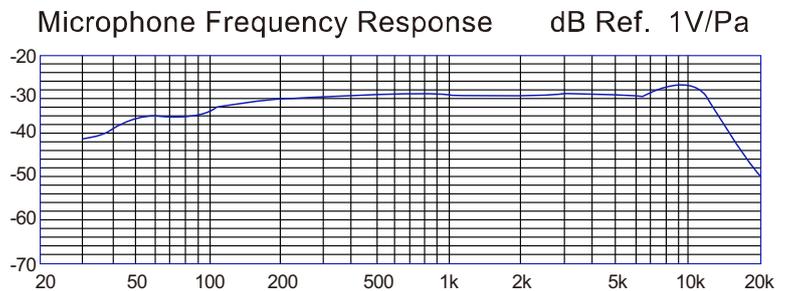

COMPONENT

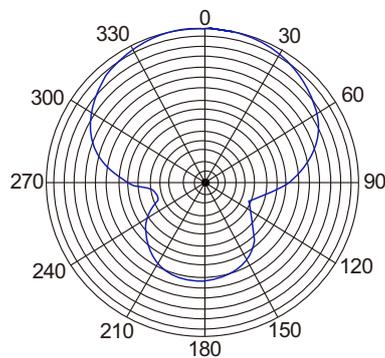

Safety box	1pc
Foam windscreen	1pc
PM-976 microphone	1pc
Microphone stand mount with adapter (5/8"-3/8")	1pc
XLR cable	1pc



SPECIFICATIONS

Element	Back Electret Condenser
Polar Pattern	Hyper-cardioid
Frequency Response	40Hz-16kHz
Bass	Built-in
Sensitivity	-32dB/-33dB±2dB(1dB=1V/Pa at 1kHz)
Output Impedance	500Ω/600Ω±20%(at 1kHz)
Max.Input SPL	130dB/115dB(T.H.D≤1% at 1kHz)
Signal to Noise Ratio	70dB(1kHz at 1Pa)
Power Requirements	48V DC/1.5V AA/UM3, 2mA
Switch	ON/OFF
Weight	188g
Body Dimensions	φ 22×305mm
Output Interface	XLRM XLR PLUS

FEATURES



Hyper-cardioid

Ideal for video, broadcast, and outdoor recording.



On/Off switch with button.



Operates on AA battery or 48V phantom power.



The gold plated XLR link makes audio frequency current with ideal transmission.



Foam windscreen with high purity anti-spray sound, soft touch. Easy to clean and not deformed and other functions.



Aluminum

Brass

Rugged housing made of aluminum alloy and brass.