


HDTV Distributor up to 1080p/UXGA

CHDD-3A is a high performance and versatile distribution amplifier for delivering both HD and SD video with digital/analog audio to your multiple display units.

Operation Manual

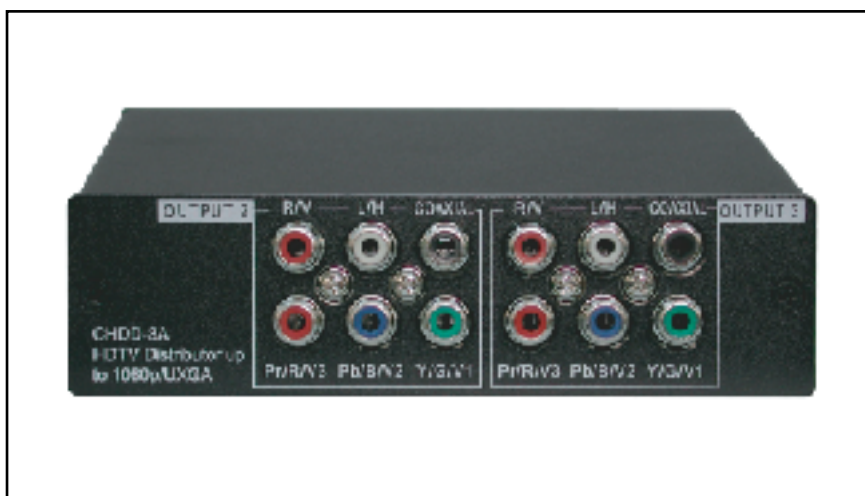

Application

The CHDD-3A is capable of distributing video in 3 different formats and is ideal for use in any analog video entertainment distribution system.

Features

- Component/ composite or RGB distribution amplifier.
- Supports SD (composite, YCbCr) and HDTV (YPbPr, RGsB) input signal.
- Accepts one component input and split the input to 3 identical and buffered outputs via 3x3 RCA connectors.
- When input is composite video, it can connect up to 3 different video sources and output three identical and buffered signal for each video input.
- It can be used for presentation and home theater application.
- High bandwidth performance - 480MHz bandwidth at -3dB
- Worldwide power supply

This package includes


- One CHDD-3A unit.
- One set of power supply
- One user manual
- One set of 2R to 2R male audio cable
- One set of 1R to 1R male video cable
- One set of 3BNC male to 3BNC male cable

Specifications


- * Input: YPbPr x 1 or RGsB x 1 (or RGBHV),
or composite x 3 1 Vp-p@ 75 ohm
- * Output: YPbPr x 3, or RGsB(or RGBHV) x 3, or composite 3 x 3
- * Audio input: Coaxial (S/PDIF) x 1 + R/L x 1
- * Audio output: Coaxial (S/PDIF) x 3 + R/L x 3
- * Analog audio input/output: Audio 2 Vrms max 47k ohm.
- * Horizontal/Vertical sync 5Vp-p max and H frequency
10KHz~100KHz, V frequency 20Hz~200Hz.
- * Bandwidth: 480MHz (-3dB)
- * Differential gain: 0.05%
- * Differential phase: 0.05 degree
- * Power: 5V 2A~1A
- * Dimension: 141(W) x 38(D) x 105(H)mm
- * Weight: 550gs

Connection and Installation

1. Works as a 1-in 3-out distribution amplifier for HD component source(YPbPr).

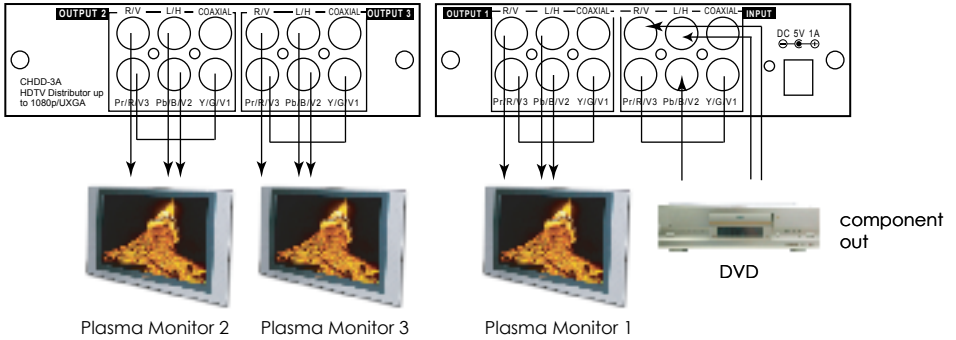

2. Works as a 1-in 3-out distribution amplifier for HD RGBHV video source.

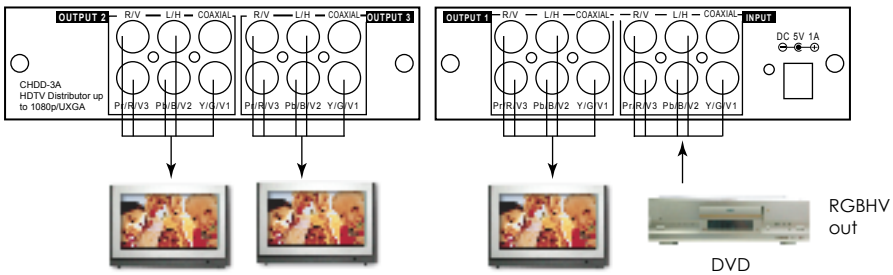

3. Works as a three 1-in 3-out distribution amplifier for composite video source.

