

21" COLOR CCTV Monitor Smart Series

CM-21DXA / ~~CM-21VXA~~



CM-21DXA



~~CM-21VXA~~

Features

- ▶ Auto loop through
- ▶ Stackable metal cabinet
- ▶ High performance with high resolution more than 500 TV lines
- ▶ Dual scanning system NTSC / PAL compatible
- ▶ Universal power input AC 100 ~ 240V
- ▶ Built-in clear and crisp speaker

CM-21DXA


- ▶ Multi-Language OSD (On Screen Display) user control
- ▶ Built-in 3 CH switcher by auto or manual
- ▶ Built-in microprocessor digital control

CM-21VXA

- ▶ VR user control

User control

CM-21DXA




CM-21VXA




Rear panel


CM-21DXA

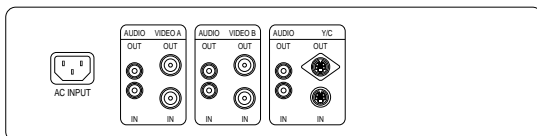

CM-21VXA

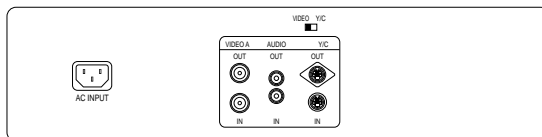



Dimensions

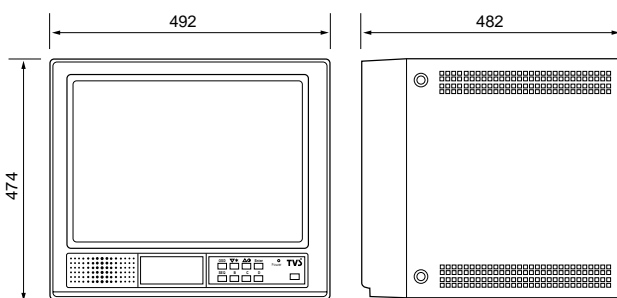

Specification

MODEL	CM-21DXA / CM-21VXA
Picture Tube	21" diagonal Flat Square Tube color
Horizontal Resolution	>500 TV lines (Center)
Scanning Frequency	15.734 KHz / 60 Hz (NTSC) 15.625 KHz / 50 Hz (PAL)
Video Input	Composite video 1.0 V p-p 75 Ω
Video Connections	CM-21DXA Video BNC in x 2, Y/C in x 1 Video BNC out x 2, Y/C out x 1 CM-21VXA Video BNC in x 1, Y/C in x 1 Video BNC out x 1, Y/C out x 1
Audio Connections	CM-21DXA RCA in x 3 RCA out x 3 CM-21VXA RCA in x 1 RCA out x 1
Control Front	CM-21DXA Power on/off, OSD for..... CM-21VXA VR control
Power Input	AC 100 ~ 240V, 50/60 Hz
Power Consumption	80W max
Dimensions (WxHxD) Packing	648 x 645 x 640 mm
Product	492 x 474 x 482 mm
Weight	Net 27.0 Kgs Gross 29.0 Kgs
Operating Humidity Condition	10% ~ 90%
Operating Temperature Range	-10°C ~ +50°C

Innovative Design of TVS DXA Series

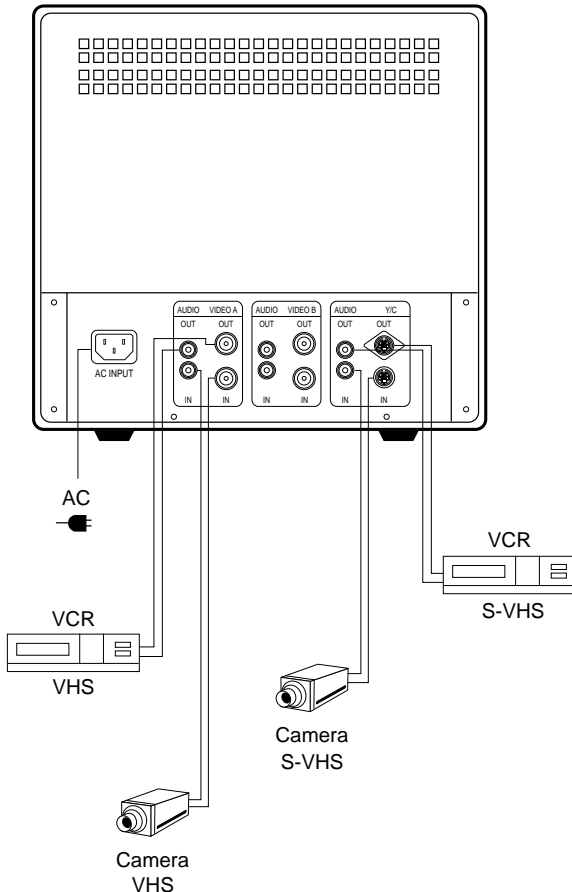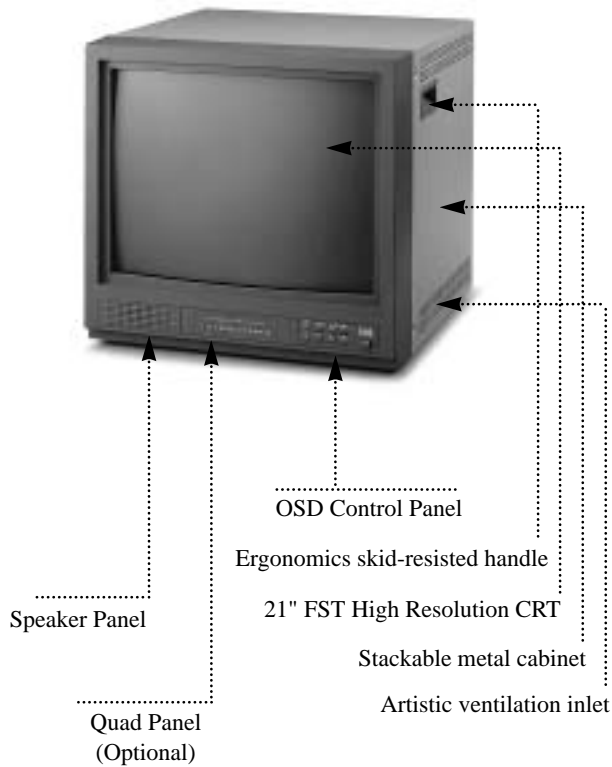

1. Smart Sense

- ▶ Auto Video Loss Detect
- ▶ Auto No Signal Detect
- ▶ Auto Loop Through

2. Smart Control

- ▶ 3 Channels Auto/Manual Switching (2 Sets of BNC In/Out, 1 Set of Y/C In/Out)
- ▶ Dwell Time Control, Sequential Auto/Manual Switcher, SWITCH TIME 1 ~ 30 seconds

3. Smart View

- ▶ On Screen Display (OSD)
- ▶ Multi-Language, OSD in Trilingual Language (English/Japanese/Chinese), Maximum extend to 8 kinds of language.
- ▶ Illustration and Numerical Instruction

1. COLOR	6. VOLUME
2. TINT	7. SWITCHER MODE
3. BRIGHTNESS	8. LANGUAGE
4. CONTRAST	9. VERSION
5. SHARPNESS	EXIT:OSD

4. Smart Systems

- ▶ PAL/NTSC Auto Detect
- ▶ AC100V ~ 240V Universal Power Source
- ▶ CVBS & Y/C Available, compatible with VCR, Camera, Multiplexer and Quad

5. Smart Tooling

- ▶ Modularized design in front bezel with speaker panel, quad panel and control panel. Can use change-code function for various outward to meet customer's distinct demands.