

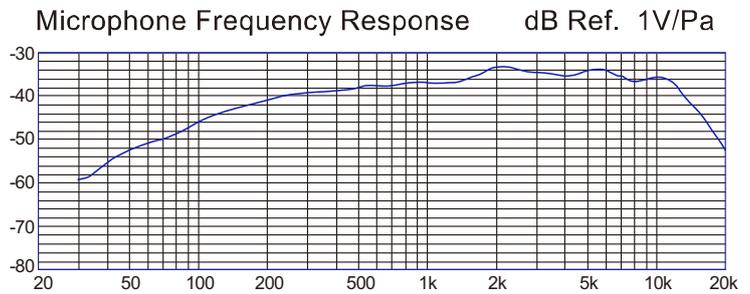


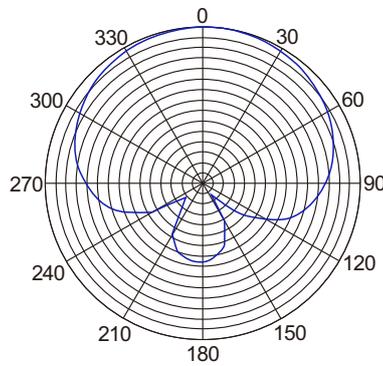

PM-650 Hyper-cardioid Condenser Microphone

- Ideal for video, broadcast, and location recording.
- Modular design makes easier to faster equipped with different function capsules.
- Equipped with “built-in shock-proof” technique new structure capsules.
- Knock-down cartridge.
- Operates on 48v phantom power only.

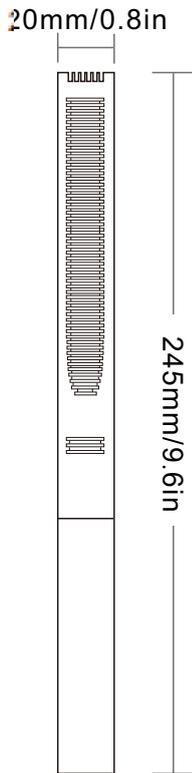

COMPONENT




Safety box	1pc
Foam windscreen	1pc
PM-650 microphone	1pc
Microphone stand mount with adapter (5/8"-3/8")	1pc
XLR cable	1pc



SPECIFICATIONS

Element	Back Electret Condenser
Polar Pattern	Hyper-cardioid
Frequency Response	40Hz-18kHz
Bass	Built-in
Sensitivity	-38dB±3dB(1dB=1V/Pa at 1kHz)
Output Impedance	500Ω±20%(at 1kHz)
Max.Input SPL	130dB(T.H.D≤1% at 1kHz)
Signal to Noise Ratio	68dB(1kHz at 1Pa)
Power Requirements	48V DC, 2mA
Weight	128g
Body Dimensions	φ 20×245mm
Output Interface	XLRM

FEATURES

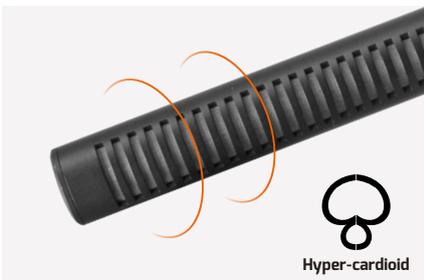

Hyper-cardioid

Ideal for video, broadcast, and outdoor recording.



Ultra-flat frequency response.

40Hz-18kHz
Frequency response




Knock-down cartridge.



Equipped with "built-in shock-proof" technique new structure capsules.



Modular design makes easier to faster equipped with different function capsules.

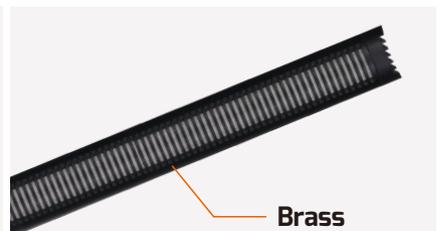

Brass

Rugged housing made of brass.