Component Video Switcher Series

ITEM NO.: YSO4A, YSO4D

Our component video switcher allows four different component video and stereo or digital) audio sources to share two video displays. Manage multiple video sources manually or remotely with this convenient unit.

YSO4A 4 Input 2 Output Component Video Switcher With Stereo Audio


- HDTV Compatible at 480i/480p/720p/1080i/1080p.
- Connect up to 4 A/V sources to two display monitors.
- Expands both stereo audio and video input.
- The switcher box is the ideal for all of devices, offering both high-definition video and audio switching capability.
- IR remote control included.

YSO4D 4 Input 2 Output Component Video Switcher With Digital Audio


- Identical to YS04A, but with digital audio instead of stereo audio.
- Digital Audio: Coax or Optical option.

Installation view:

YS04A

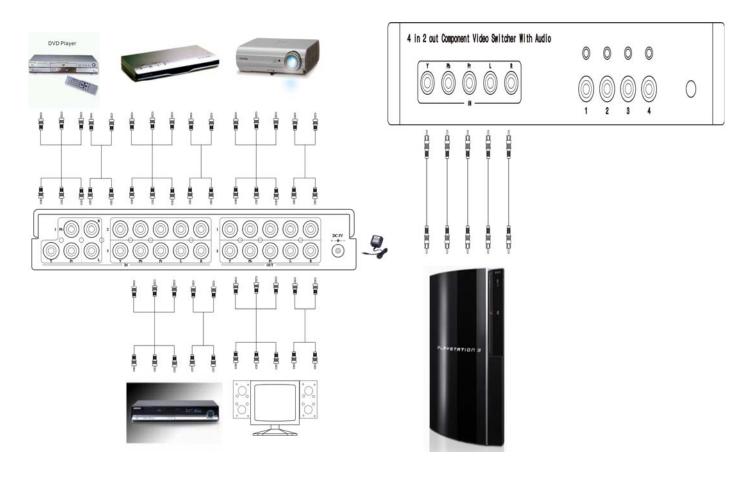

YS04D

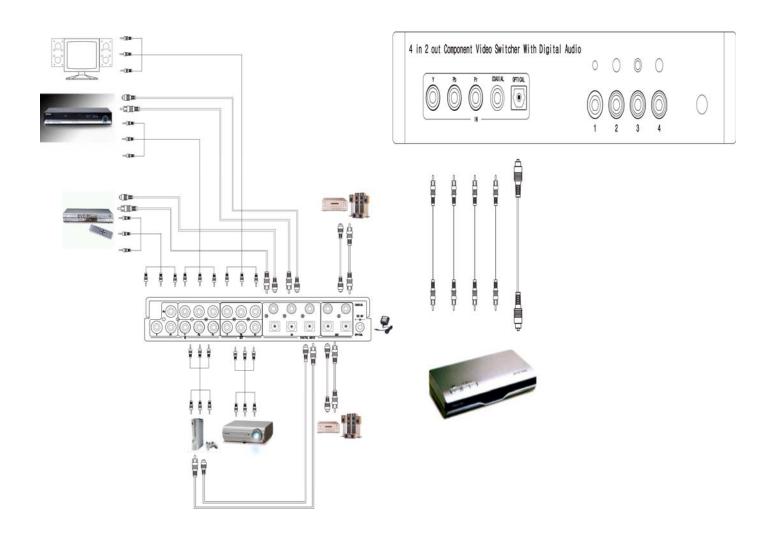

Specification:

| ITEM NO. | YS04A | YS04D |
|-------------------------|---|---|
| Input Resolution | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p. | |
| Video Bandwidth | 400Mhz | |
| Video Input (RCA) | 4 x Y (75Ω, 1.0Vp-p), PbPr (75Ω, 0.7Vp-p) | |
| Video Output | 2 x Y (75Ω, 1.0Vp-p), PbPr (75Ω, 0.7Vp-p) | |
| (RCA) | | |
| Audio Bandwidth | DC-20Khz | |
| Audio Input | RCA L/R \times 4 (10K Ω) | X |
| Audio Output | RCA L/R \times 2 (10K Ω) | X |
| Digital Audio Input | x | Coaxial (RCA 75 Ω) x 4, Optical x 4 |
| Digital Audio Output | Х | Coaxial (RCA 75Ω) x 2, Optical x 2 |
| Power Supply | 5V DC 500mA Regulated (External) | |
| Power | 250mA (Max) | |
| Consumption | | |
| Temperature | Operation: -10° \sim 45 $^{\circ}$, Storage: -30° \sim 70 $^{\circ}$ | |
| DIMENSIONS | 225x167x40 | |
| W x H x D mm | | |