

DVR & Network Solution

Network IP Camera




IR3-61P	●	●	●	●	●	●
IR3-62P	●	●	●	●	●	●

FEATURES

- > Dual Stream: M-JPEG / MPEG-4.
- > PPPoE / DDNS Support.
- > IP66 Weatherproof Outdoor Housing.
- > 2-Axis Wall Mount Bracket.
- > Sensor Trigger and Notify by E-mail or FTP.

DIMENSIONS

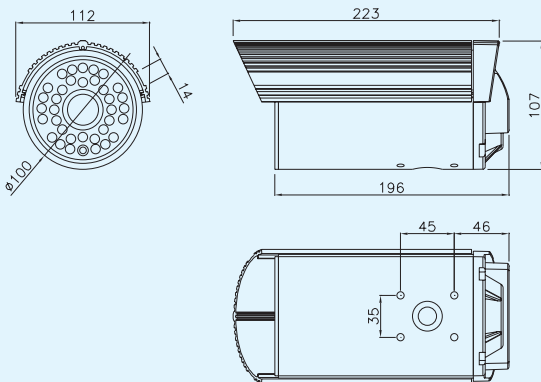

SPECIFICATIONS

Model	IR3-61P SHARP N.R. & IR3-62P SHARP H.R.	
VIDEO		
Pick-up Device	1/3" SHARP CCD Image Sensor	
Resolution	Normal Resolution (N.R.): 380 TVL; High Resolution (H.R.): 480TVL	
Gain Control	Auto	
White Balance	Auto (2500 ~ 9500K)	
Lens Furnished	12.0 mm / F1.6 CS Mount Lens	
IR LED	35 Units of 850nm High Power IR LED	
IR Projection	Up to 50 Meters	
Weatherproof	IP66 Aluminum Housing	
IMAGE		
Compression	M-JPEG / MPEG-4 for Video	
Resolution	NTSC: (30fps) Full D1 (720x480) CIF(352x240) QCIF (176x120) PAL: (25fps) Full D1(720x576) CIF (352x288) QCIF (176x144)	
Video Frame Rate	Adjustable	
Video Quality Adj.	Contrast, Brightness, Saturation, Hue	
Motion Detection	3 Different Areas, Sensitivity: 1-9	
Snapshot	Yes	
NETWORK		
Interface	Ethernet RJ-45 Wired, 10/100 Base-T	
Protocol Supported	DHCP, PPPoE, Dynamic DNS, UDP, TCP/IP, SMTP, UPnP, HTTP, RTSP, DNS Client	
SYSTEM		
CPU	SoC Embedded ARM 9, 32 bit RISC	
Triggered Action	Mail, FTP	
Security	Password Protection	
Firmware Upgrade	HTTP Mode, Upgrade Remotely	
SOFTWARE		
Operating System	Free Bundle Surveillance AP Supports 16ch Recording (WIN2000, XP, Vista)	
Internet Browser	Microsoft IE 6.0 or Above (DirectXTM 9.0C or Higher)	
OTHERS		
Power	DC12V / 1A	
Operating Temp.	-10°C to 50°C (14°F to 122°F)	
Dimension	110 (φ) * 230 (L) mm	
LIVE DEMO		
Logon via IE	60.250.158.59	
User	demo	
Password	demo	
Software	Download "Active X" and shut down the anti-virus software	

Design and specifications are subject to change without notice.

CCD Camera

DVR

CCTV Lens

Accessories