

**Video 15 SB**  
Fluid head




The key to Sachtler's successful fluid heads is their step switching. Now our innovative SPEEDBALANCE technology enables even faster and finer counterbalance of your camera system. By reducing the minimum payload, the heads' overall payload range is increased.

## Technical Facts


Weight	2.8 kg / 6.2 lbs
Payload	1 - 16 kg / 2.2 - 35 lbs
Sliding range - plate	70 mm / 2.8 in
Counterbalance	in 12 steps
Grades of drag	7 each horizontal and vertical + 0
Tilt range	+90/-75°
Temperature range	-40° to +60° C / -40 to +140° F
Camera fitting	Touch & Go® Plate 16
Tripod/Pedestal fitting	100 mm bowl, integrated flat base fitting
Pan bar(s)	1, telescopic, Type DV right
Level	self-illuminating Touch Bubble
Batteries Level	3 x 625U or LR9

## Payload


C.O.G.* min. kg / max.	
75 / 3"	1.7 / 3.7 20.4 /
100 / 4"	1.4 / 3.2 17.3 /
125 / 5"	1.3 / 2.8 15.0 /
150 / 6"	1.1 / 2.4 13.3 /
175 / 7"	1.0 / 2.2 11.9 /
200 / 8"	0.9 / 2.0 10.8 /
250 /	0.8 / 1.7 9.1 /

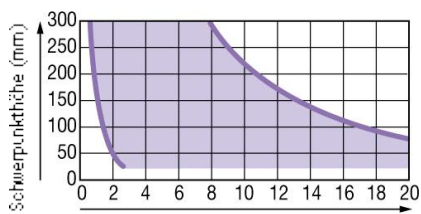

Kameraplattform  
Counterbalance

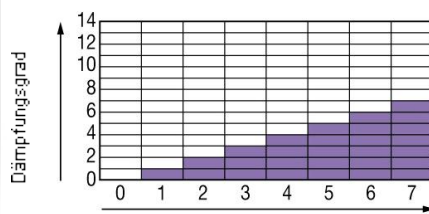

Damping

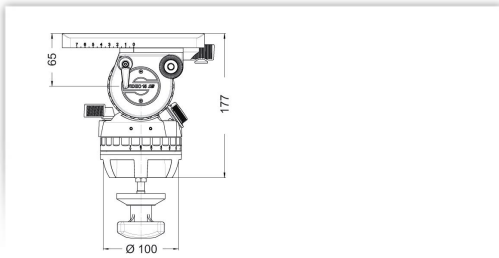

Dimensions

## Further photos



## Order data

Article	Order code
Video 15 SB Fluid head	1505

This product is also available in the following systems:

Article	Order code
System 15 SB C III	1570
System 12 SB ENG 2 D	1561
System 15 SB ENG 2 CF	1562
System 15 SB ENG 2 MCF	1563
System 15 SB SL MCF	1565

## Accessories



C.O.G. plate 16



Adapter FB/100



Adapter Ped C  
I/DV



Adapter 100/150



Multi Disc



Pan bar DV left  
(telescopic)



Adapter  
viewfinder  
extension 12/15



Accessory  
adapter



Accessory  
adapter with  
clamping