

Video 18 SB Fluid head




The key to Sachtler's successful fluid heads is their step switching. Now our innovative SPEEDBALANCE technology enables even faster and finer counterbalance of your camera system. By reducing the minimum payload, the heads' overall payload range is increased. The Video 18 SB and Video 20 SB feature exchangeable pan bar rosettes and an optional Adapter Viewfinder Extension, allowing them to be retrofitted for film-like shooting together with lightweight HD camcorders and cine accessories.

Technical Facts


Weight	3.3 kg / 7.3 lbs
Payload	2 - 18 kg / 4 - 46 lbs
Sliding range - plate	120 mm / 4.7 in
Counterbalance	in 10 steps
Grades of drag	7 each horizontal and vertical + 0
Tilt range	±90°
Temperature range	-40° to +60° C / -40 to +140° F
Camera fitting	Touch & Go® Plate 16
Tripod/Pedestal fitting	100 mm bowl
Pan bar(s)	2, telescopic, Type Plus
Level	self-illuminating Touch Bubble
Batteries Level	3 x 625U or LR9

Payload

C.O.G.* min. kg / max.	
75 / 3"	2.1 / 4.6 20.7 /
100 / 4"	1.8 / 3.9 17.7 /
125 / 5"	1.5 / 3.4 15.4 /
150 / 6"	1.4 / 3.0 13.7 /
175 / 7"	1.2 / 2.7 12.3 /
200 / 8"	1.1 / 2.5 11.2 /
250 /	0.9 / 2.1 9.4 /

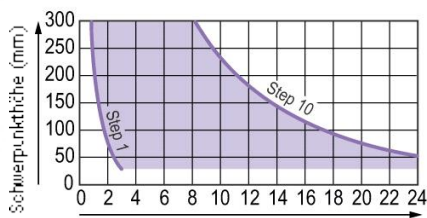


Kameraplattform
Counterbalance

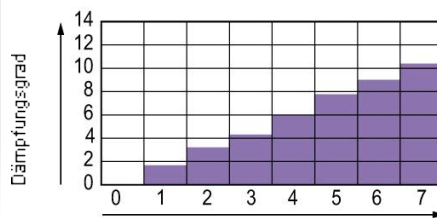

Damping

Dämpfungsstufe

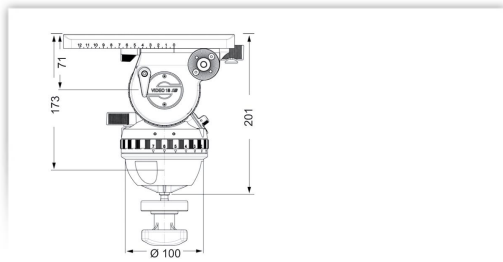

Dimensions

Further photos



Order data

Article	Order code
Video 18 SB Fluid head	1805

This product is also available in the following systems:

Article	Order code
System 18 SB ENG 2 D	1861
System 18 SB ENG 2 CF	1862
System 18 SB SL CF	1864
System 18 SB ENG 2 MCF	1863
System 18 SB SL MCF	1865

Accessories



C.O.G. plate 16



Adapter FB/100



FB Converter



Adapter Ped C
I/Plus



Adapter 100/150



Adapter
viewfinder
extension 18/20



Accessory
adapter



Accessory
adapter with
clamping