

Video 75 Plus EFP

Fluid head



Top class for every payload

New fluid head Video 75 Plus boasts a outstanding payload range of 12 to 75 kg / 26 to 165 lb. Suitable for a variety of camera configurations and flexible applications in both EFP and studio operation, this all-round talent offers users a broad palette of solutions.


- Large Payload range from 12 to 75 kg
- Proven Sachtler fluid damping
- Easily accessible brakes
- Fast changeover from EFP to Studio
- Robust design
- Lightweight

Technical Facts


Weight	11.9 kg / 26.2 lbs
Payload	12 - 85 kg / 26 - 187 lbs
Sliding range - plate	120 mm / 4.7 in
Counterbalance	in 24 steps
Grades of drag	9 each horizontal and vertical + 0
Tilt range	+90/-60°
Temperature range	-40° to +60° C / -40 to +140° F
Camera fitting	Touch & Go® Plate 35
Tripod/Pedestal fitting	150 mm bowl, integrated flat base fitting
Pan bar(s)	2 pan bar front and back sections each
Level	self-illuminating Touch Bubble
Batteries Level	3 x 625U or LR9

Payload


C.O.G.*	min. kg	max.
75 / 3"	21.0 /	122.3 /
100 / 4"	18.2 /	106.2 /
125 / 5"	16.1 /	93.9 /
150 / 6"	14.4 /	84.1 /
175 / 7"	13.1 /	76.2 /
200 / 8"	11.9 /	69.6 /
250 /	10.2 /	59.4 /
300 /	8.9 /	51.7 /

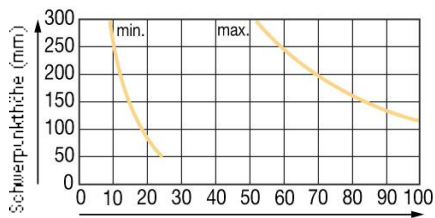

Kameraplattform
Counterbalance

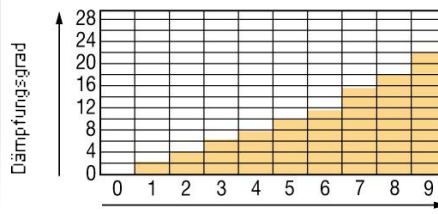

Damping

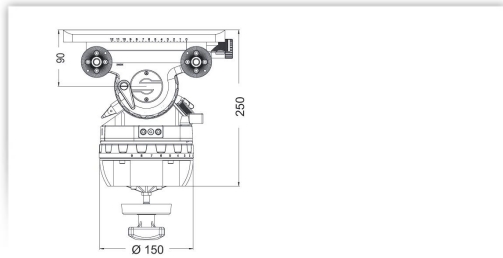

Dimensions

Further photos



Order data

Article	Order code
Video 75 Plus EFP Fluid head	7500

This product is also available in the following systems:

Article	Order code
System 75 Plus EFP	7512

Accessories



Case V/C 75



Front pan bar



Cable clamp V/C 75



Studio Setup Video 75 Plus



Adapter FB/150



Accessory adapter



Accessory adapter with clamping