

Component Video Distribution Amplifier Series

ITEM NO.: YD02A, YD02D, YD04A, YD04D

YD02A, YD02D, YD02D, YD04D are component video with analog stereo/digital audio distribution amplifiers for AV signals. They can accept a component signal input from a DVD, projector and the output is amplified to allow connection of multi display monitors. All of them could be stackable for large displays.

YD02A 1 Input 2 Output Component Video Distribution Amplifier with Stereo Audio

- 1 x Input: component video and left, right audio.
- 2 x Output: component video and left, right audio.
- Support 480i, 480p, 576i, 576p, 720p, 1080i, 1080p.
- Video Bandwidth up to 400Mhz.
- Cascade connection several units for larger displays with great picture quality.

YD02D 1 Input 2 Output Component Video Distribution Amplifier with Digital/Optical audio

- Identical to YD02A, but digital audio instead of stereo audio.
- Digital Audio: Coax or Optical option.

YD04A 1 Input 4 Output Component Video Distribution Amplifier with Stereo Audio


- 1 x Input: composite video and left, right audio.
- 4 x Output: composite video and left, right audio.
- Support 480i, 480p, 576i, 576p, 720p, 1080i, 1080p.
- Video Bandwidth up to 400Mhz.
- Cascade connection several units for larger displays with great picture quality.

YD04D 1 Input 4 Output Component Video Distribution Amplifier with Digital/Optical audio


- Identical to CD04A, but digital audio instead of stereo audio.
- Digital Audio: Coax or Optical option.

Installation View:


YD02A

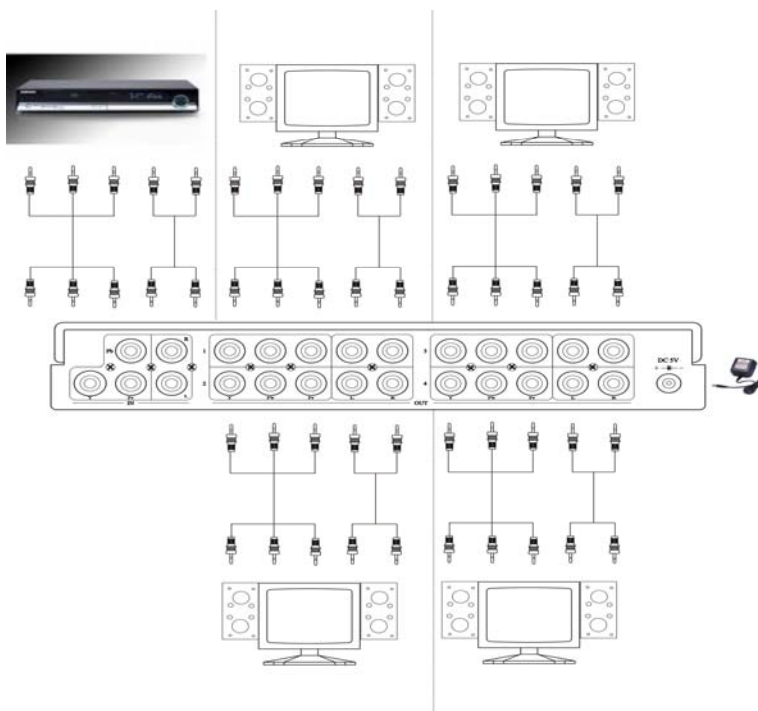


YD02D

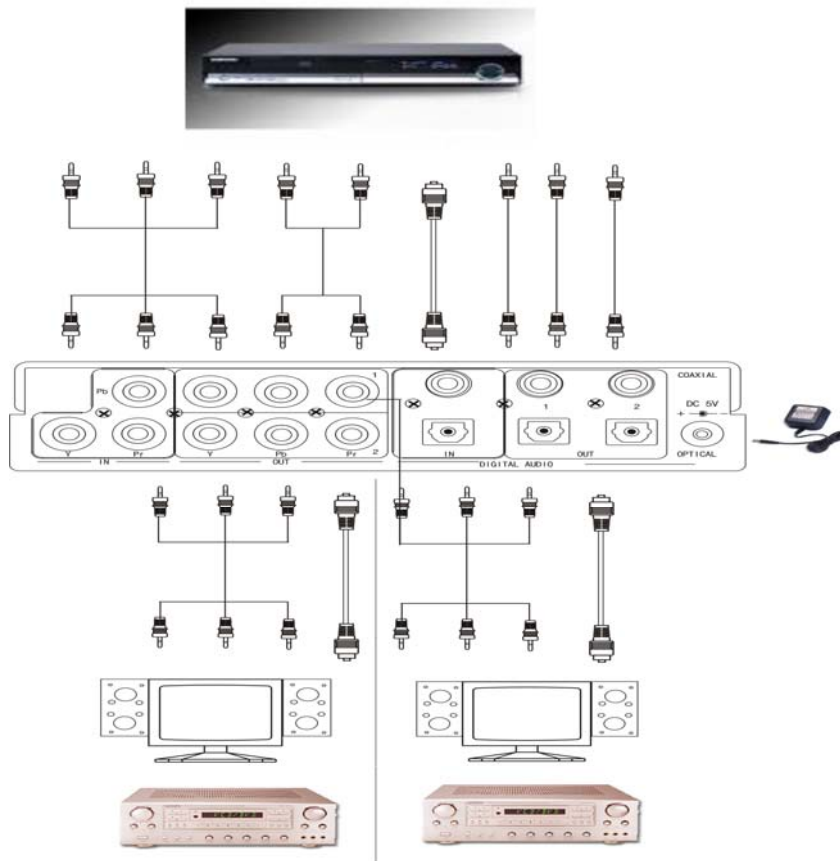

YD04A

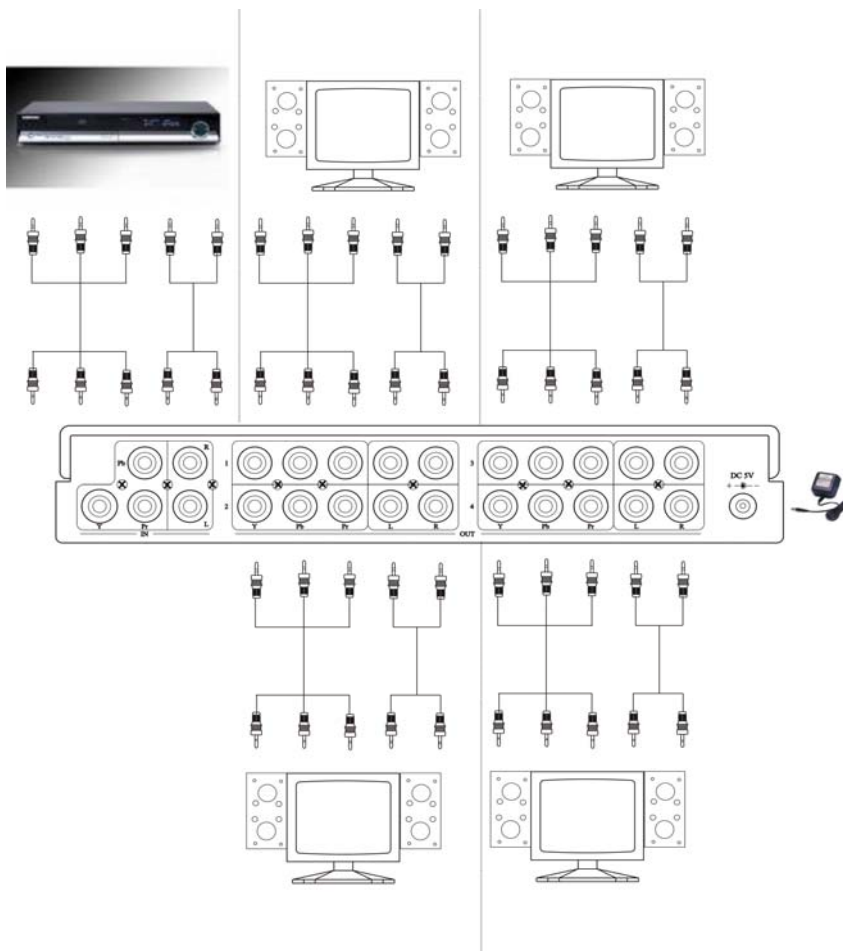

YD04D

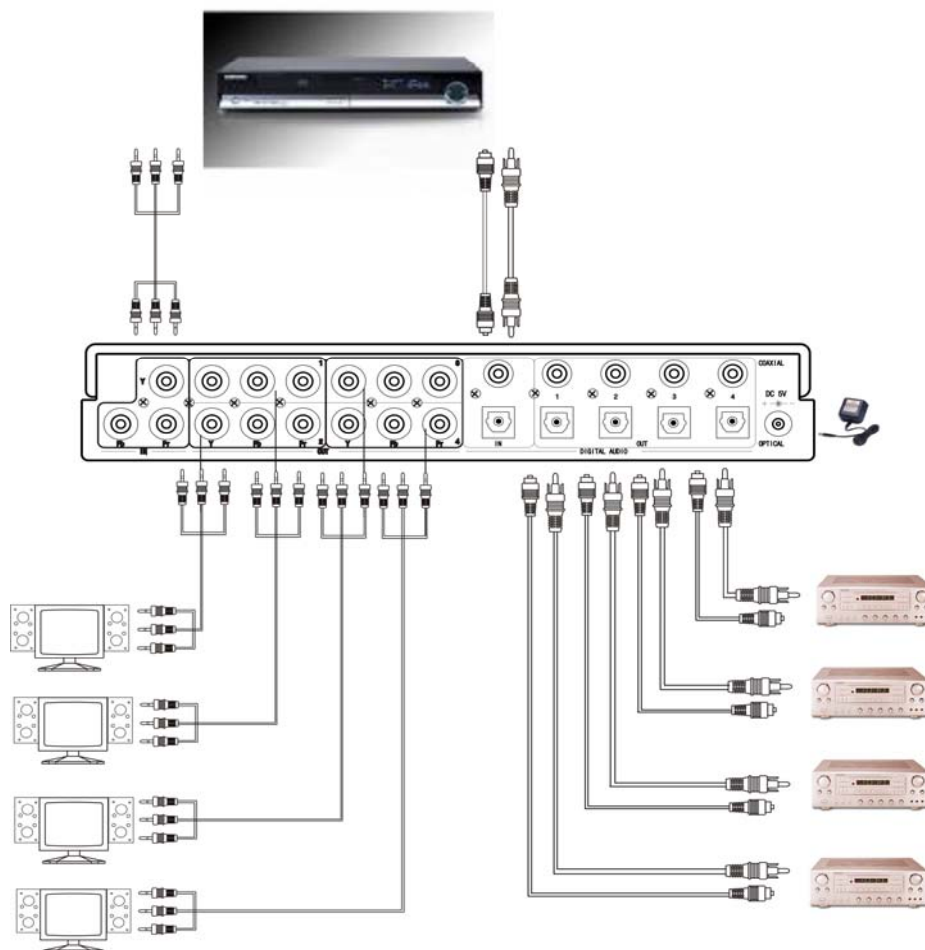

Specification:

ITEM NO.	YD02A	YD02D	YD04A	YD04D
Input Resolution	480i, 480p, 576i, 576p, 720p, 1080i, 1080p.			
Video Bandwidth	400Mhz			
Video Input (RCA)	Y (75Ω, 1.0Vp-p), PbPr (75Ω, 0.7Vp-p)			
Video Output (RCA)	2 x Y (75Ω, 1.0Vp-p), PbPr (75Ω, 0.7Vp-p)		4 x Y (75Ω, 1.0Vp-p), PbPr (75Ω, 0.7Vp-p)	
Audio Bandwidth	DC-20Khz			
Audio Input	RCA L/R x 1 (10KΩ)	x	RCA L/R x 1 (10KΩ)	x
Audio Output	RCA L/R x 2 (10KΩ)	x	RCA L/R x 4 (10KΩ)	x
Digital Audio Input	x	Coaxial (RCA 75Ω) x 1, Optical x 1	x	Coaxial (RCA 75Ω) x 1, Optical x 1
Digital Audio Output	x	Coaxial (RCA 75Ω) x 2, Optical x 2	x	Coaxial (RCA 75Ω) x 4, Optical x 4
Power Supply	5V DC 500mA Regulated (External)			
Power Consumption	300mA (Max)			
Temperature	Operation: -10°C~45°C, Storage: -30°C~70°C			
DIMENSIONS W x H x D mm	145x96x37		225x167x40	