

DVI Distribution Amplifier

ITEM NO.: DD02, DD02A, DD02D, DD04, DD04A, DD04D

DD02, DD02A, DD02D, DD04, DD04A, DD04D are DVI distribution amplifiers for DVI signals. They can accept a DVI signal input from a computer and the output is amplified to allow connection of multi display monitors.

DD02 1 Input 2 Output DVI Distribution Amplifier

- Connects up to 2 DVI displays at the same time to one video source.
- Supports high resolution
PC: VGA, SVGA, XGA, SXGA, UXGA
- DVI cable to be used up to 15meters (output/input).

DD02A 1 Input 2 Output DVI Distribution Amplifier With Stereo Audio

- Identical to DD02, but with analog audio.

DD02D 1 Input 2 Output DVI Distribution Amplifier With Digital/Optical Audio

- Identical to DD02, but with digital audio.
- Digital Audio: Coax or Optical option.

DD04 1 Input 4 Output DVI Distribution Amplifier

- Connects up to 4 DVI displays at the same time to one video source.
- Supports high resolution
PC: VGA, SVGA, XGA, SXGA, UXGA
- DVI cable to be used up to 15meters (output/input).

DD04A 1 Input 4 Output DVI Distribution Amplifier With Stereo Audio


- Identical to DD04, but with analog audio.

DD04D 1 Input 4 Output DVI Distribution Amplifier With Digital/Optical Audio


- Identical to DD04, but with digital/optical audio.
- Digital Audio: Coax or Optical option.

Installation View:


DD02

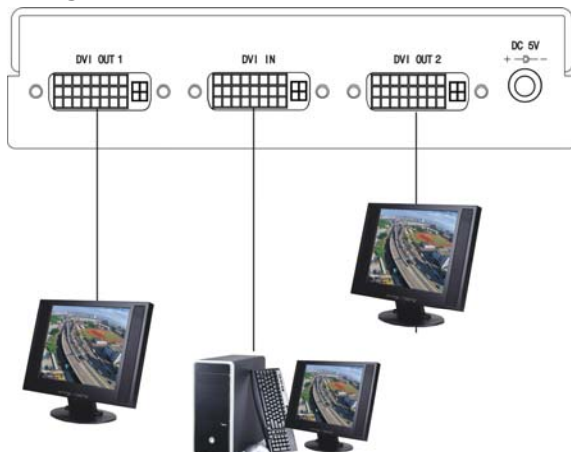


DDO2A

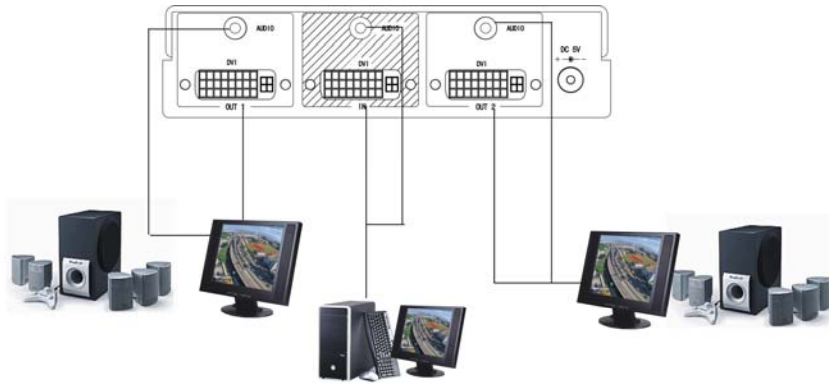


DDO2D

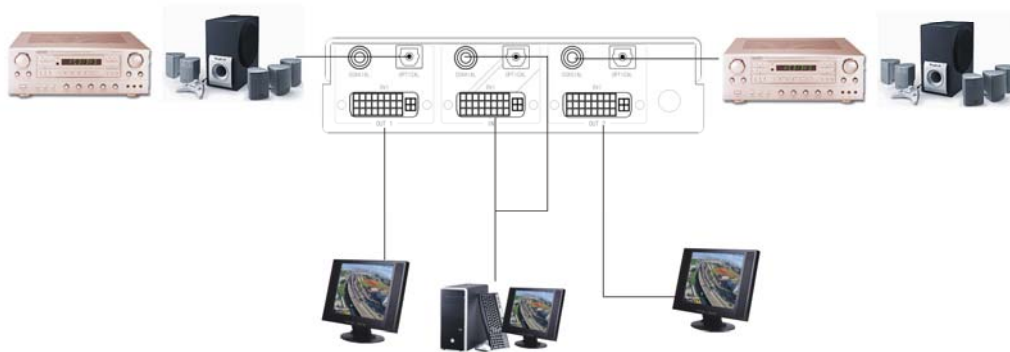


DDO4

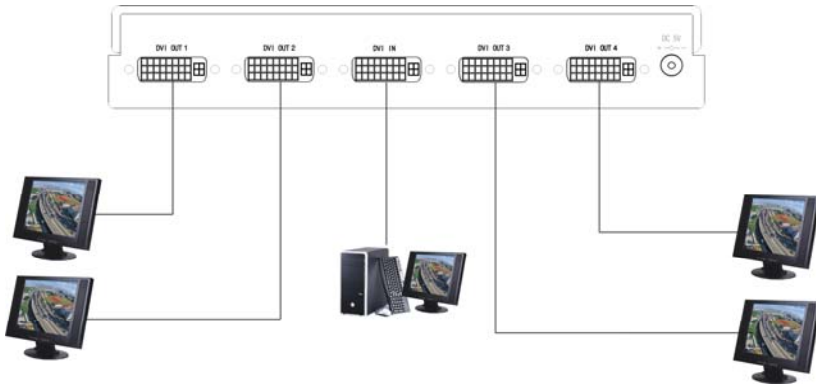

DDO4A

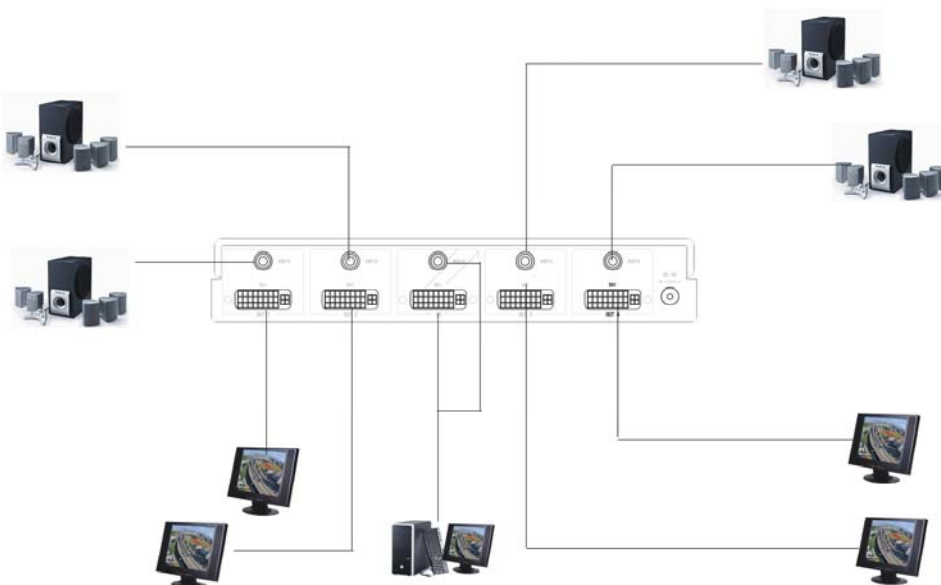

DD04D

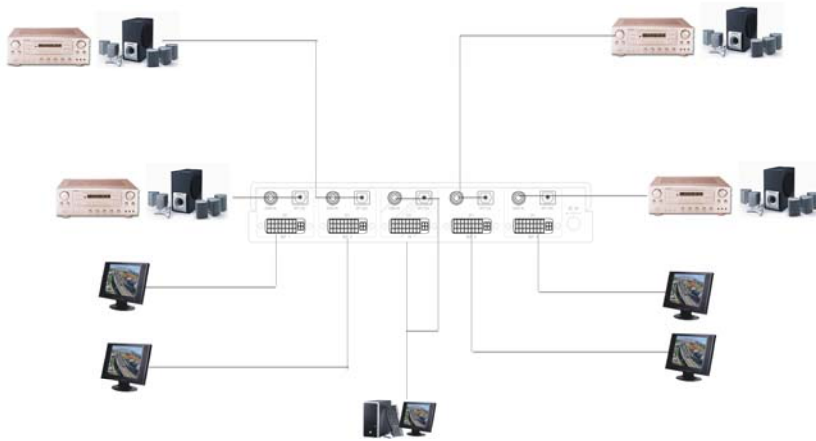

Specification:

ITEM NO.	DD02	DD02A	DD04A
DVI Input	1 (DVI-D 29 pin)	1 (DVI-D 29 pin)	1 (DVI-D 29 pin)
DVI Output	2 (DVI-D 29 pin)	2 (DVI-D 29 pin)	4 (DVI-D 29 pin)
Audio Input	x	1 PHONE JACK ϕ 3.5	1 PHONE JACK ϕ 3.5
Audio Output	x	2 PHONE JACK ϕ 3.5	4 PHONE JACK ϕ 3.5
Supports Bandwidth	27MHz ~ 165MHz		
Supports Resolution	PC: VGA, SVGA, XGA, SXGA, UXGA		
Operation Temperature	-10°C ~ 45°C		
Storage Temperature	-30°C ~ 70°C		
Power Consumption	500mA	500mA	700mA
Power Supply	DC5V 1AMP included		
DIMENSIONS W x H x D mm	145X95X37	145X95X37	225X165X40

ITEM NO.	DD02	DD02D	DD04D
DVI Input	1 (DVI-D 29 pin)	1 (DVI-D 29 pin)	1 (DVI-D 29 pin)
DVI Output	2 (DVI-D 29 pin)	2 (DVI-D 29 pin)	4 (DVI-D 29 pin)
Audio Input	Optical JACK	x	1
	COAXIAL JACK	x	1(SPDIF)
Audio Output	Optical JACK	x	4
	COAXIAL JACK	x	4(SPDIF)
Supports Bandwidth	27MHz ~ 165MHz		
Supports Resolution	PC: VGA, SVGA, XGA, SXGA, UXGA		
Operation Temperature	-10°C ~ 45°C		
Storage Temperature	-30°C ~ 70°C		
Power Consumption	500mA	500mA	700mA
Power Supply	DC5V 1AMP included		
DIMENSIONS W x H x D mm	145X95X37	145X95X37	225X165X40