


# TWISTED PAIR TRANSMISSION SYSTEM

**ITEM NO.:** TTP111VP-LK Video & Power Transceiver


**Features:**

- Transmit video and power over one CAT 5 networking cable.
- Include 2 units: 1 x RJ45 to BNC with DC power plug, 1 x RJ45 to BNC with DC power jack.
- Eliminate coaxial & power cable.
- Fast, easy installation, saving time and money.
- Substantial saving on the cost of the cable itself.


**Installation View:**

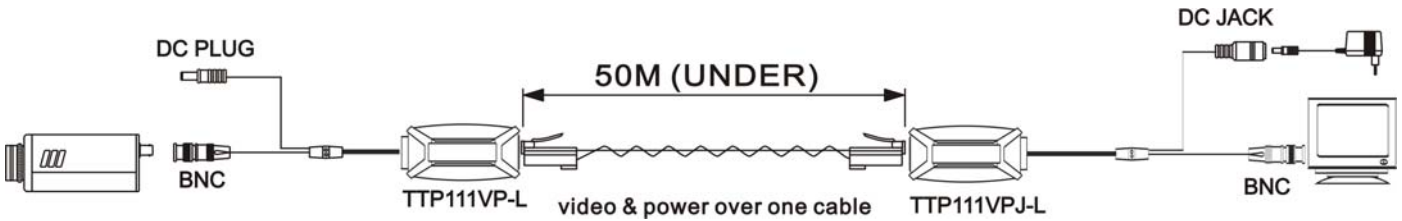

**Panel View:**

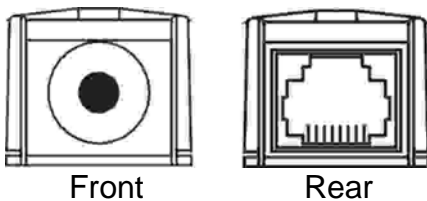

**RJ-45 Jack Pin Define**

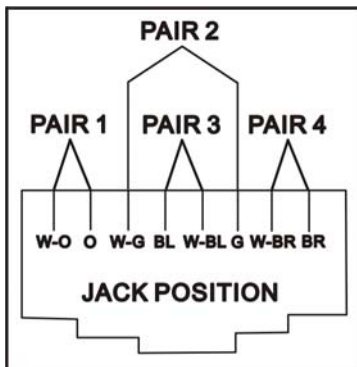

**RJ45 pin connect**

- Pair 1 : 1. Orange-white & 2. Orange
- Pair 2 : 3. Green -white – & 6. Green + —→ Power
- Pair 3 : 5. Blue-white – & 4. Blue + —→ Power
- Pair 4 : 7. Brown-white & 8. Brown —→ Video

**Specification:**

<b>ITEM NO.</b>	<b>TTP111VP-LK</b>
VIDEO INPUT	1V p-p, 75 Ohms
TRANSMISSION DISTANCE	600M(B/W), 300M(COLOR)
REQUIRED CABLE	Twisted Pair CAT-5E (AWG24)
POWER	Pass Through
DIMENSIONS W x H x D mm	69x25x22 with 10cm cable

## Voltage Drop According to Cable Length (24AWG):

Power	Power Supply Voltage 12 Volts DC								
Range	50M			100M			300M		
Camera Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	11.4	11.7	11.8	10.8	11.3	11.6	9.6	10.6	11
100mA	11	11.5	11.5	9.7	10.8	11.2		9.2	10.1
150mA	10.5	11.2	11.3	9	10.4	10.9			9.3
200mA		11	11.2		9.9	10.6			
250mA		10.7	11		9.4	10.2			
300mA		10.5	10.8			9.9			
350mA		10.3	10.6			9.7			
400mA		10	10.4			9.4			
450mA		9.6	10.2						
500mA		9.2	9.8						

Voltage	DC15V											
Range	50M			100M			300M			600M		
Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	14.4	14.7	14.8	13.8	14.3	14.6	11.9	13.6	14	X	12	12.9
100mA	14	14.5	14.5	12.7	13.8	14.2	X	12.2	13.1	X	X	11.1
150mA	13.5	14.2	14.3	12	13.4	13.9	X	11.1	12.3	X	X	X
200mA	12.6	14	14.2	11.3	12.9	13.6	X	X	11.5	X	X	X
250mA	12.1	13.7	14	10.3	12.4	13.2	X	X	X	X	X	X
300mA	11.8	13.5	13.8	X	12	12.9	X	X	X	X	X	X
350mA	11.3	13.3	13.7	X	11.7	12.7	X	X	X	X	X	X
400mA	10.8	13	13.5	X	11.2	12.4	X	X	X	X	X	X
450mA	X	12.7	13.3	X	10.7	12.1	X	X	X	X	X	X
500mA	X	12.4	13.1	X	X	11.6	X	X	X	X	X	X

Voltage	DC24V											
Range	50M			100M			300M			600M		
Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	23.8	23.8	23.8	23	23.5	23.6	21	22.4	23	18.1	21.2	22.1
100mA	23.6	23.4	23.5	22.4	23.1	23.3	18.7	21.1	22.2	12.9	18.7	20.4
150mA	22.6	23.2	23.3	21.3	22.6	22.9	16.2	20	21.3	X	16.1	18.9
200mA	22.1	22.9	23.1	20.3	22	22.5	13.7	18.1	20.5	X	13.5	17.1
250mA	21.6	22.6	22.9	19.4	21.6	22.2	10.9	17.4	19.6	X	11.1	15.4
300mA	21.1	22.4	22.7	18.4	21.2	21.9	X	16.1	18.8	X	X	13.8
350mA	20.6	22.1	22.5	17.5	20.6	21.6	X	15	18.1	X	X	12.2
400mA	20.2	21.8	22.3	16.5	20.1	21.2	X	13.9	17.3	X	X	10.7
450mA	19.7	21.6	22.1	15.5	19.6	20.9	X	12.7	16.6	X	X	X
500mA	19.1	21.3	21.9	14.5	19.1	20.5	X	11.3	15.4	X	X	X

## AC24V Power Distance Chart over UTP cable:

CAT5 Cable (24AWG)	Range
2 PAIRS/AC24V	
100 mA	300 Meters
300mA	100 Meters
1 Amp	30 Meters