

Product Features

- 8" CCTV LCD Monitor
- Rack mountable (side-by-side) for standard 19" rack
- Resolution 800 x 600 pixels
- NTSC/PAL auto recognition
- Multi-language OSD
- Last memory for settings when powered off
- Power saving while no signal input
- Low power consumption with LED backlight
- Key lock function




LV80R Specification

Specification \ Model		LV80R
DISPLAY	Screen Size	8" TFT LCD
	Aspect Ratio	4 : 3
	Max. Resolution	800 x 600 / 480 TVL
	Viewable Size (HxV)	162 x 121.5 mm
	Pixel Pitch (HxV)	0.0675 x 0.2025 mm
	Brightness	250 cd/m ²
	Contrast Ratio	500 : 1
	Viewing Angle (HxV)	140° / 120°
	Display Color	16.7 M
	Response Time (Tr/Tf)	10/15 ms
Panel Life Time	20,000 hrs	
I/O INTERFACE	Video Input	BNC IN x 2 (1.0 Vp-p 75Ω), S-Video x 1
	Video Output	BNC x 2
	Audio Input	RCA Jack R,L x 2
	Audio Output	RCA Jack R,L x 1
ELECTRICAL	Power Input	AC 100~240V, 50/60 Hz
	Power Supply	DC 12V / 1.5A
GENERAL	Power Consumption	10W max. / Standby 2W max.
	Operating Condition	Temp.: 0°C ~ 40°C, Hum.: 20% ~ 85%
	Storage Condition	Temp.: -20° ~ 60°C, Hum.: 20% ~ 85%
	Dimension (WxHxD)	190 x 173 x 25 mm
	Net Weight	1.1 kg
FEATURES	Regulations	CE, FCC
	Built in Speakers	1W (Max.)
OPTION	OSD Languages	English, Traditional Chinese, Simplified Chinese, Japanese, French, German, Spanish, Italian, Russian, Portuguese, Czech
	Mounts	RK-80 Rack Assembly DW1700C, DW1710C (12 kg Max. Weight)
	Others	Anti-Reflection Strengthen Glass

*Specifications subject to change without notice. V1.1

Dimension

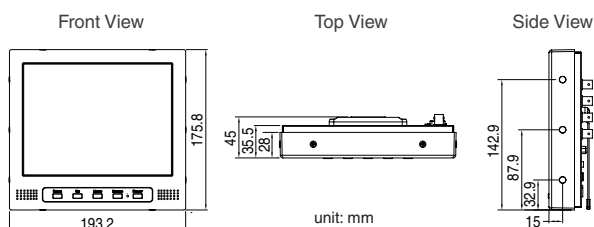


Accessory



Adjustable View Angle for Rack



Hinge Stand as a Photo Frame

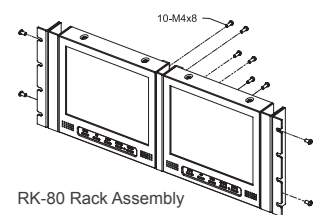

RK-80 Rack Assembly

19" Rack Side by Side

