

19" Professional LED Surveillance Monitor

Product Features

- Streamline Compact Metal Back Cover
- DC 12V Power Output Power for a Single Camera
- Adaptive 3D Comb Filter and 3D De-interlace Technology
- VGA , HDMI , Video , BNC In / Out x2 , SDI in / Out (Optional)
- User Friendly Front Control and OSD Multi-language Support
- USB Input for Firmware Upgrade / Membrane Keypad for Button
- Mount Option: Wall and Rack Mount

Specification

Specification \ Model		MJ19
DISPLAY	Screen Size	19" LED Backlight
	Aspect Ratio	5 : 4
	Max. Resolution	1280 x 1024
	Viewable Size (HxV)	376.32 x 301.06 mm
	Pixel Pitch (HxV)	0.294 x 0.294 mm
	Brightness	250 cd/m ²
	Contrast Ratio	1000 : 1
	Viewing Angle (HxV)	170° / 160°
	Display Color	16.7M
	Response Time (Tr/Tf)	5 ms
Panel Life Time	30,000 hrs	
I/O INTERFACE	Video Input	VGA (15pin D-SUB) x1, BNC x2, RCA Video x1, HDMI x1, S-Video x1
	Video Output	BNC x 2 , S-Video x1
	Audio Input	RCA Audio x2 , RCA Audio x2 (Left / Right)
	Audio Output	RCA Audio x2
ELECTRICAL	Power Input	DC 12V / 3.3A
	Power Output	DC 12V / 0.5A
	Power Supply	AC100~240V, 50/60Hz
	Power Consumption	MAX : 26W
GENERAL	Operating Condition	Temp.: 0°C ~ 40°C, Hum.: 20% ~ 80%
	Storage Condition	Temp.: -20°C ~ 60°C, Hum.: 20% ~ 80%
	Dimension (WxHxD)	421.2 x 405.6 x 170.0 mm
	Net Weight	4.91 kg
	Regulations	CE, FCC
FEATURES	Built in Speakers	1W
	PIP & POP	Yes
	3D Comb Filter	Yes
	3D De-interlace	Yes
	OSD Languages	English, Traditional Chinese, Simplified Chinese, French, German, Spanish, Italian, Japanese, Russia, Portugal, Dutch, Czech
OPTION	Glass	Anti-reflection Strengthened Glass
	Mounts	DW1700C, DW1710C (12 kg Max. Weight)
	Rack Mounts	RK-19
	Video Input / Output	SDI in x 1 / out x 1

*Specifications subject to change without notice. V1.0




Accessory



Wall Mount Kit
DW-1700C (Three Knuckle Adjustment)
DW-1710C (Two Knuckle Adjustment)

Rack Mount Kit
RK-19 (for 19")

Dimension

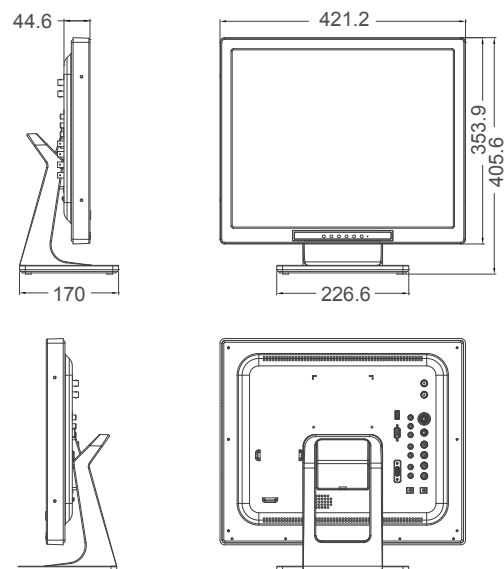

unit: mm