

# HD-SDI Bullet Camera

## Full HD, 24 IR

### DMC-2024BIC

#### ◆ Picture




#### ◆ Feature

- 1/3" PS-Panasonic CMOS
- Full HD 2.2 Megapixel (1080p) Display
- LED On: 0Lux
- Day/Night with ICR
- DNR (Digital Noise Reduction)
- Max. Transmission distance (200m) via coaxial cable(5CHFBT)
- SMPTE 292M(HD-SDI)
- 3.6mm Fixed Mega Pixel Lens
- Built-In High Effective IR 24 EA (Visible Distance: 15M)
- Outdoor Type



#### ◆ Dimensions

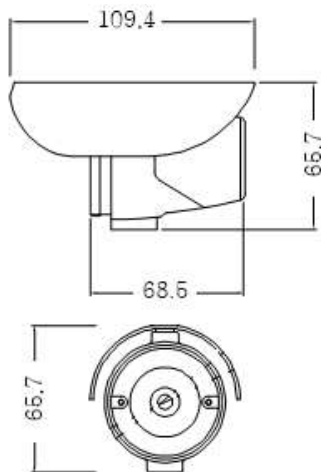

Unit: mm

#### ◆ Specifications

| MODEL                   | DMC-2024BIC                             |
|-------------------------|---|
| <b>Video</b>            |   |
| Image Sensor            | 1/3" 2.2 Mega(1080p) Panasonic CMOS     |
| Scan mode               | Progressive Scan                        |
| Total number of pixels  | 2010(H) × 1108 (V), 2.2M                |
| Number of active pixels | 1944(H) × 1092 (V)                      |
| Resolution              | 1,100 TVL                               |
| Minimum illumination    | 0.001Lux with Sense-up(8x)              |
| Video Output            | HD-SDI, SMPTE-292M                      |
| S/N Ratio               | More than 50dB (AGC Off)                |
| <b>Lens</b>             |   |
| Lens                    | 3.6mm Fixed Mega Pixel Lens             |
| Iris                    | Electric Iris                           |
| <b>Function</b>         |   |
| Day & Night             | Auto                                    |
| White Balance           | Auto                                    |
| AGC                     | Auto                                    |
| DNR                     | Auto                                    |
| Shutter                 | Auto                                    |
| <b>IR LED</b>           |   |
| LEDs                    | 24 LEDs (850nm)                         |
| Visible Distance        | 15m                                     |
| <b>Environment</b>      |   |
| Operating Humidity      | 30 % ~ 90 % RH                          |
| Operating Temp.         | - 20°C to 50°                           |
| <b>Electrical</b>       |   |
| Power Consumption       | Max 3.5W                                |
| Power Supply            | DC12V±10,                               |
| <b>Mechanical</b>       |   |
| Construction            | Aluminum body , Acrylic Window          |
| Dimension               | 66.7mm(H) X68.5mm(L) X109mm(Sunshield)) |
| Weight                  | About 0.4kg                             |