


DS-1010P Digital Storage Oscilloscope

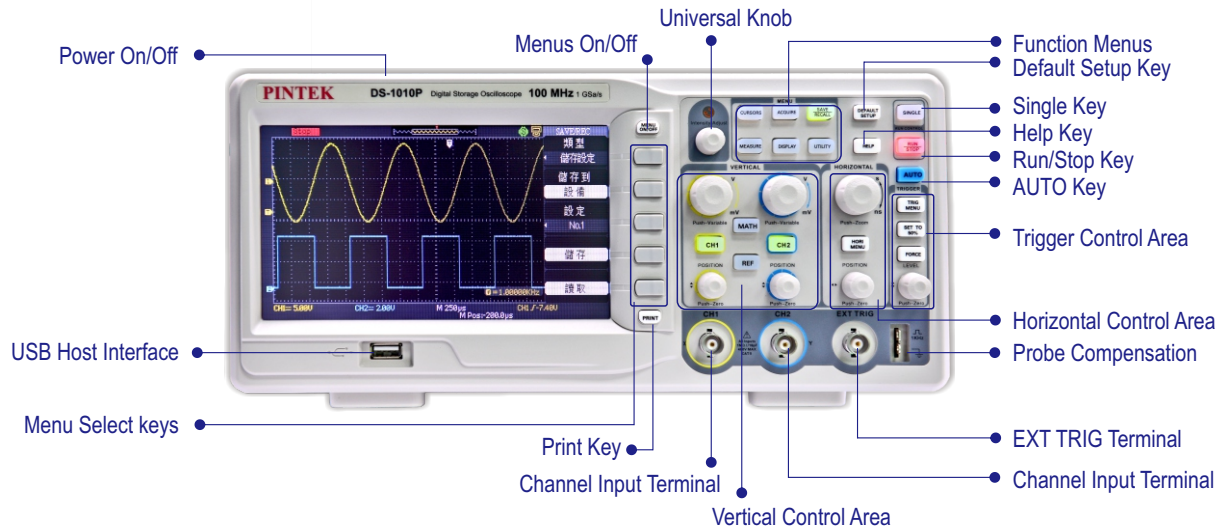

SPECIFICATIONS:

DISPLAY SYSTEM			
Display Mode	Color TFT 7.0in.(177.8mm) diagonal Liquid Crystal Display		
Resolution	480 x 234 pixels	Display Color	24 bit
Backlight Intensity (Typical state)	300nit	Display Contrast (Typical state)	150:1
Persist	Off, 1 sec, 2 sec, 5 sec, Infinite	Wave Display Mode	Dots, Vector
Menu Display	2 sec, 5 sec, 10 sec, 20 sec, Infinite	Wave Display range	8 x 18 div
Screen-Saver	Off, 1min, 2min, 5min, 10min, 15min, 30min, 1hour, 2hour, 5hour		
Skin	Classical, Modern, Tradition, Succinct		
Waveform Interpolation	Sin(x)/x, Linear		
Color Model	Normal, Invert		
Language	Simplified Chinese, Traditional Chinese, English, Arabic, French, German, Russian, Portuguese Spanish, Japanese, Korean, Italian		
ENVIRONMENT			
Temperature	Operating: 10°C to +40°C ; Storage: -20°C to 60°C		
Cooling	The fan forces it cold		
Humidity	Operating: 85%RH, 40°C, 24 hours; Storage: 85%RH, 65°C, 24 hours		
Height	Operating: 3000m ; Storage: 15,266m		
POWER SUPPLY			
Input Voltage	100-240 VAC, CAT II, Auto Selection		
Frequency Scope	45Hz to 440Hz		
Power	50VA Max		
MECHANICAL			
Dimension	(L) 323.1mm x (W) 135.6mm x (H) 157mm		
Weight	2.5KG		

SALES AGENT