

# IP IR PTZ Camera

36X, 1080P, 400M

## DMC-3614SEIW

### Picture





### Feature

- 1/1.9" PS-CMOS 2M IP IR PTZ Camera
- 1080p@30fps frame rate, H.264 Compression with **Ambarella** Codec
- Optical 36x Zoom, Digital 12x Zoom, Auto Focus
- Day & Night with ICR, Low up to 0.0005Lux with DSS(x32), LED On: 0Lux
- 3D DNR, Motion Detection, Privacy Masking (8), Defog, Time Schedule
- Preset(250), Group(12), Tour, Trace, Alarm(1/1), Dehumidification
- Max. IR Distance 400m (10pcs High Power LEDs + 4pcs Laser LEDs)
- Outdoor Type(IP66), Fan/Heater

MODEL	DMC-3614SEIW
<b>Video</b>	
Image Sensor	1/1.9" 2Mega Sony CMOS
Scan mode	Progressive Scan
Total number of pixels	1,952(H) x 1,241(V), 2.4M Pixels
Number of active pixels	1,937(H) x 1,097(V), 2.1M Pixels
Resolution	1080P
Minimum illumination	Color : 0.15Lux , BW : 0.015Lux, LED On:0Lux Min. Color 0.005Lux, B/W 0.0005Lux with DSS(32x)
Video Output	LAN / CVBS : 1.0Vp-p, 75Ω Composite
S/N Ratio	50dB
<b>Lens</b>	
Lens	5.8~210mm(F1.5~F4.8) Optical(36x), Digital Zoom(12x), Total Zoom (432x)
Focus mode	Auto / Manual / Oneshot
Angle of view	H:60°~3.7°, V:34.58°~1.99°
<b>Network</b>	
Hardware	Flash (32Mbyte), RAM (256Mbyte) Ethernet: RJ-45(10/100BASE-T)
Video Output	Channel 1ch (CVBS) Compression H.264 & MJPEG Dual Codec FULL HD(1920X1080), HD(1280X720P), VGA(640X480), QVGA(320X240) Max. Frame rate 30/25 fps Bitrate control : CBR or VBR(64K~12Mbps)
Audio	Audio In(1), Audio Out(1), 8 bit PCM (G711 u-law) 8Khz, Mono
Memory Slot	SD/SDHC Memory Slot
Event	Alarm / Motion Detection : E-mail, FTP, Event, Noti- Service
Recording	Manual / Schedule / motion Detection / Sensor Event
Client Viewer	Web viewer, CMS, Max-i
Network Protocol	HTTP, TCP/IP, UDP, ARP, ICMP, RTP/RTSP/ DHCP, Telnet, FTP, ,NTP, DDNS, SMTP, UPNP, PPPoE, Onvif, PSIA
<b>Pan/ Tilt</b>	
Pan/Tilt angle	360° Endless / -10°~ 92°
Pan Speed	0.1° ~ 120°/sec (64 Levels), Preset: 240°/sec
Preset point	250 Presets
Alarm in/out	1 Inputs / 1 Relay Output
<b>Function</b>	
Day & Night	Day / Auto Slow / Auto fast / Night
Back Light	Off / DWDR / HLC / BLC
White Balance	Auto / Indoor / Outdoor
DNR	Off / Low / Middle / Max
Privacy / Motion	8 Zones / 1 Zones
Color Level	Level Setting
Defog	Off/Auto/Manual
IR Distance	Max. 400m: 10pcs High Power LEDs+4pcs Laser LEDs
<b>Environment</b>	
Operating Humidity	30 % ~ 90 % RH
Operating Temp.	- 50°C to 50°
<b>Electrical &amp; Mechanical</b>	
Power Consumption	Max 42W

Power Supply	AC24V, 50/60Hz
Construction	Aluminum body(Ivory/Black) & Plastic Window(Black)
Dimension	238(W)X341(H)mm
Weight	About 5Kg (Camera Only)
Certificate	CE, FCC, KC, IP66, IK10

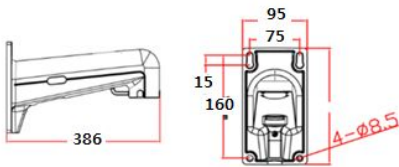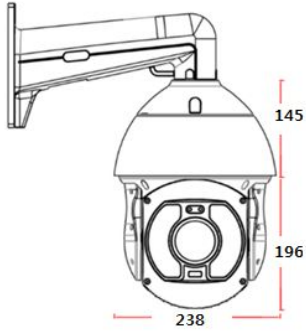

Unit: mm