

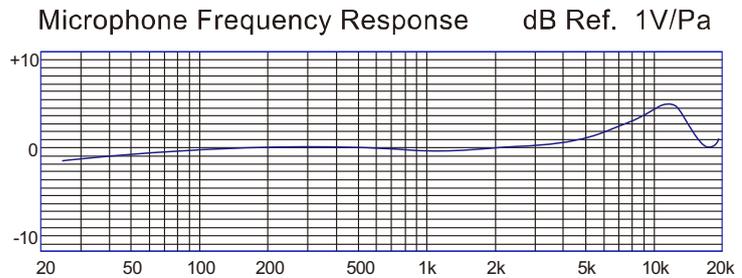


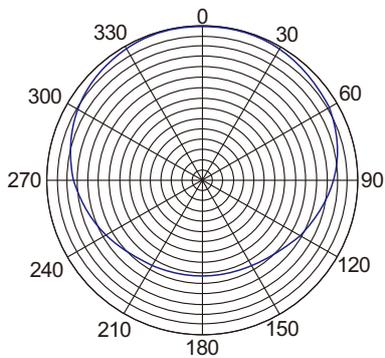

M3060 Omni Microphone

The E-IMAGE M-3060 is a miniature omni-directional lavalier microphone designed for speech and vocal pickup, general sound reinforcement, recording and remote monitoring applications. The omni-directional pattern provides even frequency and sensitivity response at the direct and off-axis sections of the microphone capsule. It provides a wide frequency response of 40Hz - 16kHz. The wide frequency response enables the microphone to accurately reproduce audio signal from a wide variety of sources.

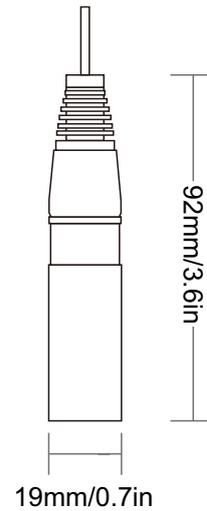

COMPONENT



M3060 microphone	1pc
Foam windscreen	1pc



SPECIFICATIONS

Element	Back Electret Condenser
Polar Pattern	Omni
Frequency Response	40Hz-16kHz
Sensitivity	-42dB±3dB(1dB=1V/Pa at 1kHz)
Equivalent Noise Level	≤ 25DbA
Max.Input SPL	130dB(T.H.D≤1% at 1kHz)
Power Requirements	48V (48V DC), 2mA
Line Length	5M
Output Interface	XLRM XLR PLUG

FEATURES



Omni microphone.



Line length: 5M



Foam windscreen with high purity anti-spray sound, soft touch. Easy to clean and not deformed and other functions.



Operates on 48V phantom power.



Can be clipped to neckties, lapels and other articles of clothing.



Rugged housing made of aluminum alloy