

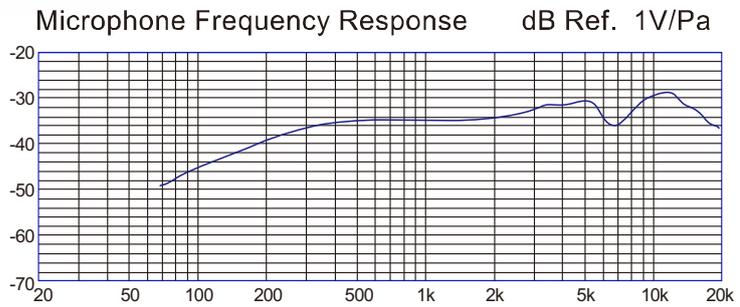


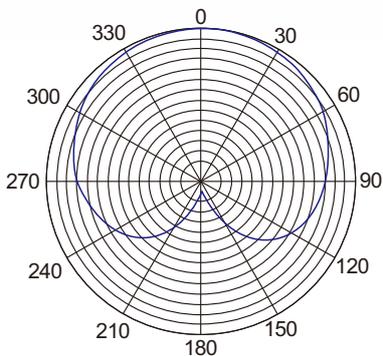

CM-520 Cardioid Condenser Microphone

The E-IMAGE CM-520 is a cardioid desktop microphone designed for use during speeches and conferences, and in boardrooms, lecture halls, and similar venues. The mic's cardioid pickup rejects off-axis sound, blocking out unwanted background noise. The microphone is constructed from brass shell, it provides a 40 Hz to 16 kHz frequency response, and is powered by a 48V phantom power.

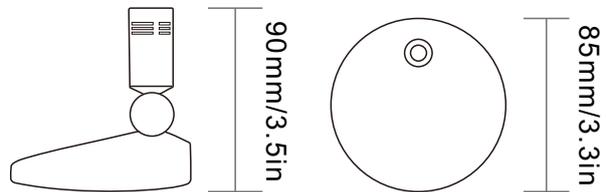

COMPONENT



CM-520 microphone	1pc
XLR cable	1pc
Foam windscreen	1pc



SPECIFICATIONS

Element	Back Electret Condenser
Polar Pattern	Cardioid/Hyper-cardioid/Omni
Frequency Response	40Hz-16kHz
Sensitivity	-38dB±3dB(1dB=1V/Pa at 1kHz)
Output Impedance	600Ω±20%(at 1kHz)
Equivalent Noise Level	≤ 25DbA
Signal to Noise Ratio	70dB(1kHz at 1Pa)
Max.Input SPL	130dB(T.H.D≤1% at 1kHz)
Power Requirements	48V DC,2mA
Line Length	3M
Output Interface	XLRM XLR PLUG

FEATURES

 <p>The E-IMAGE CM-420 is a cardioid desktop microphone designed for use during speeches and conferences, and in boardrooms, lecture halls, and similar venues.</p>	 <p>Interchangeable with hyper-cardioid and omni sound heads.</p>	 <p>48V phantom power.</p> <p>Length: 3M </p>
 <p>The gold plated XLR link makes audio frequency current with ideal transmission.</p>	 <p>Foam windscreen with high purity anti-spray sound, soft touch. Easy to clean and not deformed and other functions.</p>	 <p>Brass</p> <p>Brass shell paint by special flannel lacquer, which makes the products beautiful.</p>