

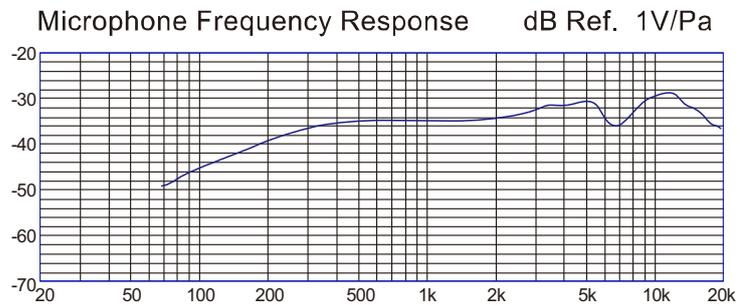


CM-720 Cardioid Condenser Microphone

The E-IMAGE CM-720 is a cardioid desktop microphone designed for use during speeches and conferences, and in boardrooms, lecture halls, and similar venues. The mic's cardioid pickup rejects off-axis sound, blocking out unwanted background noise. The microphone is constructed from brass shell, it provides a 40Hz to 16kHz frequency response, and is powered by a 48V phantom power.

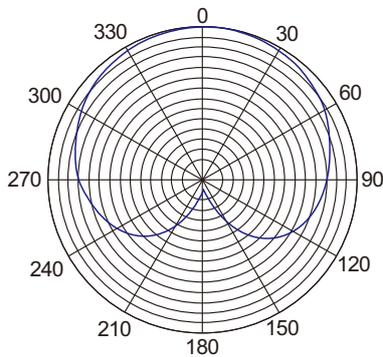

COMPONENT

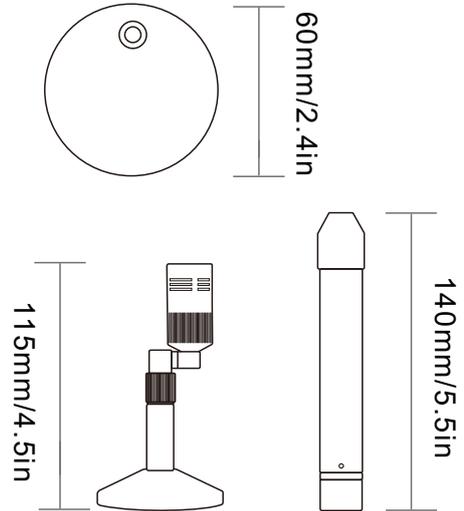

| | |
|-------------------|-----|
| Safety box | 1pc |
| CM-720 microphone | 1pc |
| Foam windscreen | 1pc |



SPECIFICATIONS

| | |
|------------------------|------------------------------|
| Element | Back Electret Condenser |
| Polar Pattern | Cardioid/Hyper-cardioid/Omni |
| Frequency Response | 40Hz-16kHz |
| Sensitivity | -38dB±3dB(1dB=1V/Pa at 1kHz) |
| Output Impedance | 600Ω±20%(at 1kHz) |
| Equivalent Noise Level | ≤25DbA |
| Signal to Noise Ratio | 70dB(1kHz at 1Pa) |
| Max.Input SPL | 130dB(T.H.D≤1% at 1kHz) |
| Power Requirements | 48V DC,2mA |
| Line Length | 3M |
| Output Interface | XLRM XLR PLUG |

FEATURES



The E-IMAGE CM-720 is a cardioid desktop microphone designed for use during speeches and conferences, and in boardrooms, lecture halls, and similar venues.



Interchangeable with hyper-cardioid and omni sound heads.



It can be changed to a professional shotgun microphone.



Line length: 3M

48V phantom power.

The gold plated XLR link makes audio frequency current with ideal transmission.



Foam windscreen with high purity anti-spray sound, soft touch. Easy to clean and not deformed and other functions.



Material: Brass

Brass shell paint by special flannel lacquer, which makes the products beautiful.