Microphone

ITEM NO.: AA003PJA




AA003PJA Mini Hidden Microphone with Volume Adjustment

- One add-on mini hidden audio board for all cameras which need audio function.
- High sensitive microphone with 50cm power/audio cable.
- Easy to install and ideal for all security surveillance needs.
- DC12V power operation.

Installation View:

AA003PJA

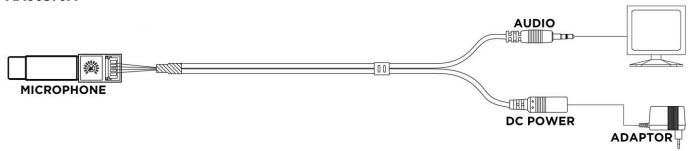

Remark: Since Hi sensitivity microphone, AA003PJA audio pick up box must be put at 5 meters away from monitor to avoid any audio reverberation.

Specification:

| ITEM NO. | AA003PJA |
|-------------------|--|
| AUDIO OUTPUT | Max 2 V p-p |
| SENSITIVITY | -66dB±3dB |
| POWER SUPPLY | DC 12 V (+ / - 0.5V) |
| POWER CONSUMPTION | 10 mA |
| TEMPERATURE | Operation: -10 to 45° C, Storage: -30 TO 60° C, Humidity: up to 95% |
| DIMENSIONS mm | 24*8*515 mm (Audio Box) |
| WEIGHT g | 25 g |